


MHT8584



LED Brand	CITIZEN
	CLU034-1206B8-303M1A2
LED Power	25 W Max
Driver	AK30W-700-D6
Total Power	30 W Max
Driver Current	700 mA
Luminous Flux	2080 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	18° / 30°

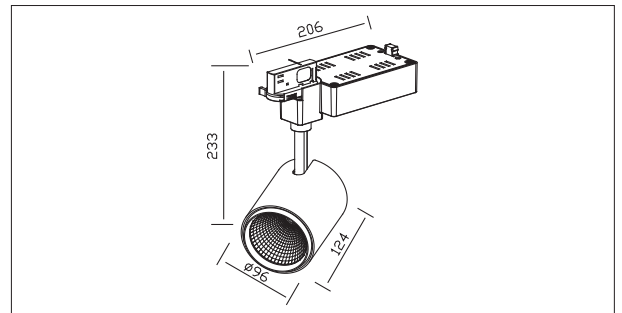

Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	adaptor
Wiring:	Track adaptor
Optics:	V.M.Reflector
MOQ	204 pcs


PACKING

Box size:	29 x 24 x 10.5 cm
Carton size:	59.5 x 49.5 x 33.5 cm
Pcs per carton:	12 pcs
Each carton :	0,098 m ³



MHT8584A



LED Brand	DOB
Total Power	30 W
Luminous Flux	2000 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	24 °

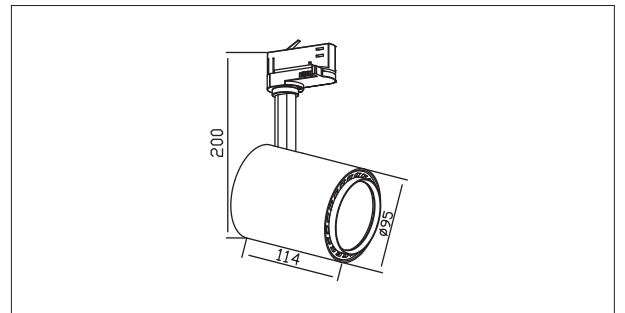

Input:	220-240 V AC 50/60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Screws
Wiring:	W/screws
Optics:	V.M.Reflector
MOQ	204 pcs

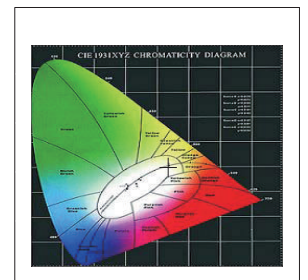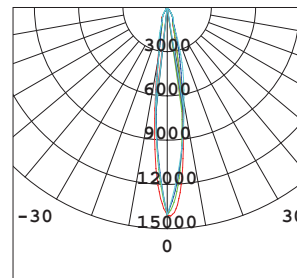


PACKING

Box size:	24.5 x 20 x 10 cm
Carton size:	41.5 x 25.5 x 42 cm
Pcs per carton:	8 pcs
Each carton :	0,044 m ³

MHT8585



LED Brand	CITIZEN
	CLU034-1208B8-303M1A2
LED Power	36 W Max
Driver	HEP-LTC40W1000 UNI
Total Power	40 W Max
Driver Current	1000 mA
Luminous Flux	3700 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	24°

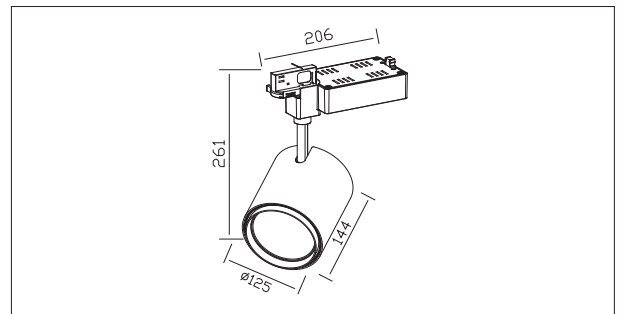

Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	adaptor
Wiring:	Track adaptor
Optics:	V.M.Reflector
MOQ	200 pcs

PACKING

Box size:	31 x 24 x 13.5 cm
Carton size:	49.5 x 32 x 56 cm
Pcs per carton:	8 pcs
Each carton :	0,088 m ³

MHT8585A



LED Brand	DOB
Total Power	40 W
Luminous Flux	2750 LM
CCT	3000 K
CRI	> 80
Beam Angle	24 °

Input: 220-240 V AC 50/60 Hz

Main Material: Aluminium

Surface Finish: White, Grey, Black powder coating




Adjustable : Gimbal

Installation by: Screws

Wiring: W/screws

Optics: V.M. Reflector

MOQ: 200

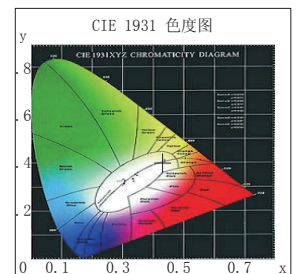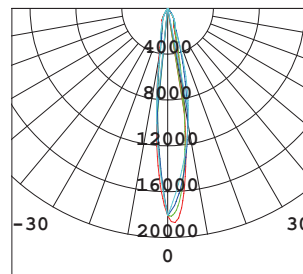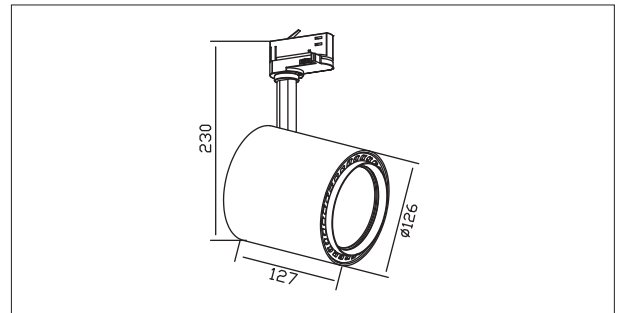

PACKING

Box size: 27 x 18.5 x 13.5 cm

Carton size: 55.5 x 19.5 x 56 cm


Pcs per carton: 8 pcs

Each carton : 0.067 m³

MHT8586



LED Brand	CITIZEN
	CLU044-1212B8-303M1A2
LED Power	55 W Max
Driver	HEP-LTC60W1500 UNI
Total Power	60 W Max
Driver Current	1500 mA
Luminous Flux	5590 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	24°

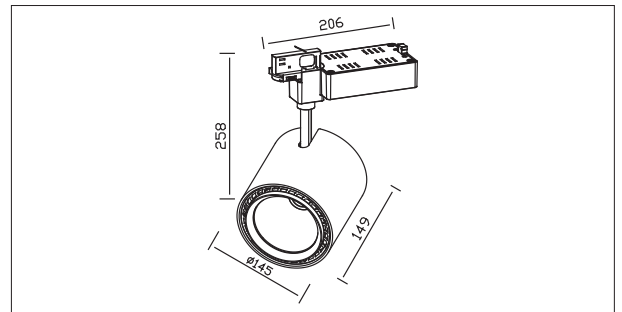

Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Adaptor
Wiring:	Track adaptor
Optics:	V.M.Reflector
MOQ	204 pcs


PACKING

Box size:	32.5 x 24 x 15.5 cm
Carton size:	49.5 x 33.5 x 48.5 cm
Pcs per carton:	6 pcs
Each carton :	0,08 m ³

MHT8556H MHT8556



Item	MHT8556	MHT8556H
Input:	110-230V AC 50/60Hz	220-240V AC 50/60Hz
LED Brand	Osram	Osram
	CT11B-W4F-830-L24	PL-CN111AC-G1
LED Power	26 W	22.5 W
Driver	AK-30W-700-D6	AC
Total Power	29 W	25 W
Driver Current	700 mA	700 mA
Luminous Flux	1780 LM	1850 LM
CCT	3000 K	3000 K
CRI	> 80	> 80
Beam Angle	24°	24°

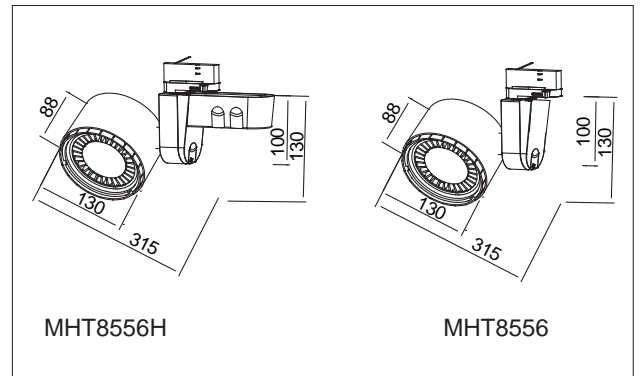

Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/ adaptor
Wiring:	track adaptor
Optics:	PMMA lens
MOQ	100 pcs

PACKING

Box size:	33.5 x 21 x 9.5 cm
Carton size:	43.5 x 34.5 x 50 cm
Pcs per carton:	10 pcs
Each carton :	0,075 m ³

MHT8558 MHT8554



MHT8558


MHT8554

LED Brand	Bridgelux Vero13 BXRC-30E2000
LED Power	23 W
Driver	AK-30W-700-D6
Driver Current	700mA
Total Power	26 W
Luminous Flux	1780 LM
CCT	3000 K
CRI	> 80
Beam Angle	18° (30°)

Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	adaptor
Wiring:	Track adaptor
Optics:	V.M. Reflector


PACKING

Box size:	33 x 21.1 x 8 cm
Carton size:	44.5 x 34 x 38 cm
Pcs per carton:	8 pcs
Each carton :	0.051 m ³

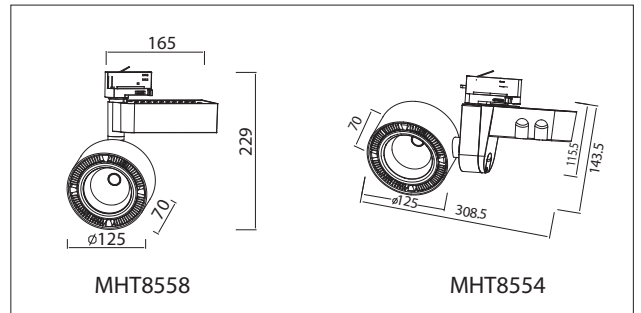

MHT8558

MHT8554

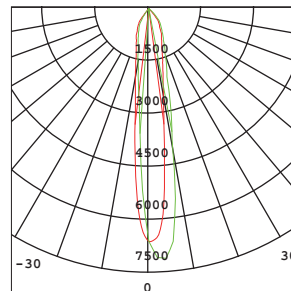

E (lx)	h (m)	20.58°	Ø (cm)
49027	1		25.59
12251	2		51.18
5445	3		76.76
3063	4		102.35
1960	5		127.94


MHT8664 Gx8.5
MHT8704 G53 QR111



MHT8664 Gx8.5

MHT8704 G53 QR111

ITEM:	MHT8664		MHT8704
Input:	230V AC 50Hz		
Lamp Type:	GX8.5 HIR111-CE-P 70 W		G53 QR111 70 W
Main Material:	Aluminium		
Surface Finish:	White, Grey, Black powder coating		
Adjustable :	Gimbal		
Installation by:	W/ adaptor		
Wiring:	Track adaptor		
Optics:	V.M. Reflector		

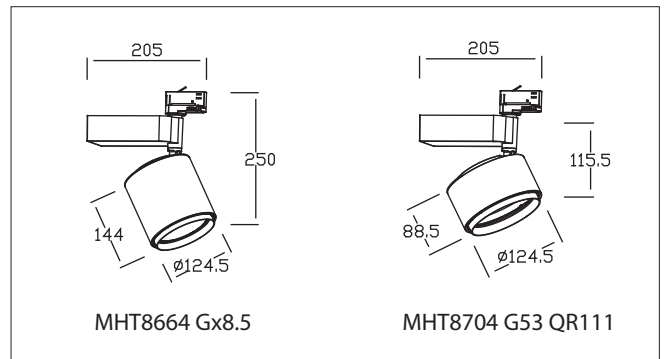

MHT8664 Gx8.5

MHT8704 G53 QR111

PACKING	MHT8704 G53 QR111		MHT8664 Gx8.5
Box size:	29x20.5x13.5 cm		33 x 21.1 x 8 cm
Carton size:	42.5x30x56.5 cm		44.5 x 34 x 38 cm
Pcs per carton:	8 pcs		8 pcs
Each carton :	0,072 m ³		0.051 m ³


MHT8663 G12 MHT8703 HIPAR30



MHT8663 G12

MHT8703 HIPAR30

ITEM:	MHT8663		MHT8703
Input:	230V AC 50Hz		
Lamp Type:	G12 HIT-CE 70 W		E27 HIPAR30 70 W
Main Material:	Aluminium		
Surface Finish:	White, Grey, Black powder coating		
Adjustable :	Gimbal		
Installation by:	W/ adaptor		
Wiring:	Track adaptor		
Optics:	V.M. Reflector		
Reflecting cup angle:	20 ° / 44 ° / 60 °		

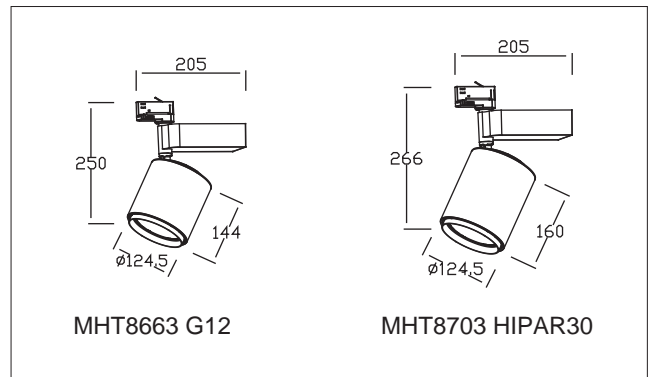

MHT8663 G12

MHT8703 HIPAR30

PACKING


Box size:	MHT8663 G12 25.3 x 17.1 x 13 cm	MHT8703 HIPAR30 27 x 17.1 x 13 cm
Carton size:	52.3 x 52.3 x 28.5 cm	52 x 52.3 x 28.5 cm
Pcs per carton:	12 pcs	12 pcs
Each carton :	0.078 m ³	0.082 m ³

MHT8583



- Passive cooling
Patent product / 专利产品

LED Brand	LUMINUS CXM18
LED Power	37.8 W
Driver	KEP40W-4310A1
Total Power	40 W
Driver Current	1000 mA
Luminous Flux	3230 LM
CCT	3000 K
CRI	≥ 80/90/95
Beam Angle	15° / 24°

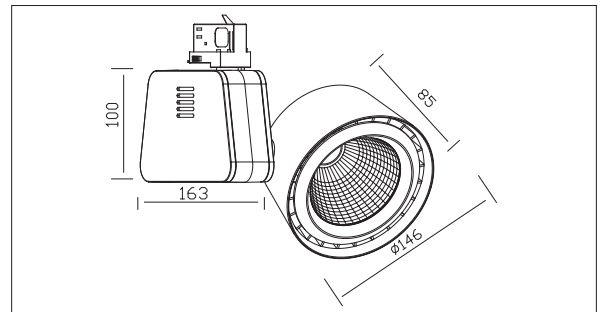


Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Adaptor
Wiring:	Track adaptor
Optics:	V.M.Reflector
MOQ	200 pcs


PACKING

Box size:	24 x 22 x 21 cm
Carton size:	49.5 x 45.5 x 44 cm
Pcs per carton:	8 pcs
Each carton :	0,099 m ³

HKTA8582

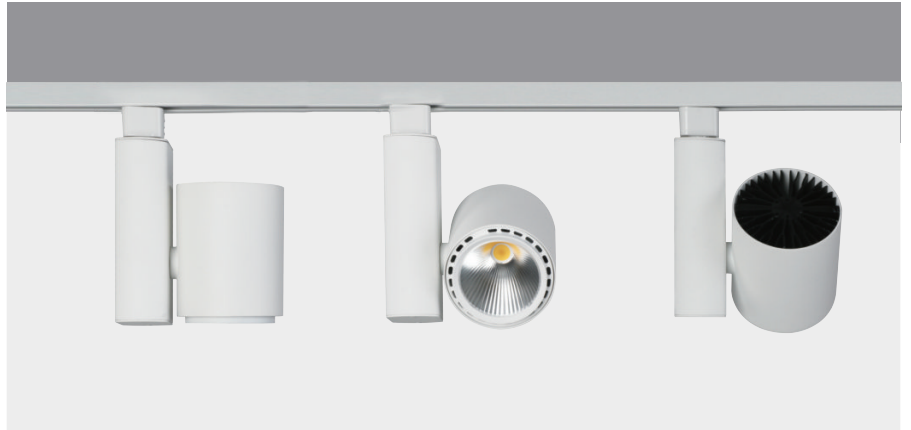

LED Brand	CITIZEN CLL032-1208A5-303M1A2
LED Power	25 W
Driver	AK-30W-700-D6
Total Power	30 W
Driver Current	700 mA
Luminous Flux	2250 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	24 °

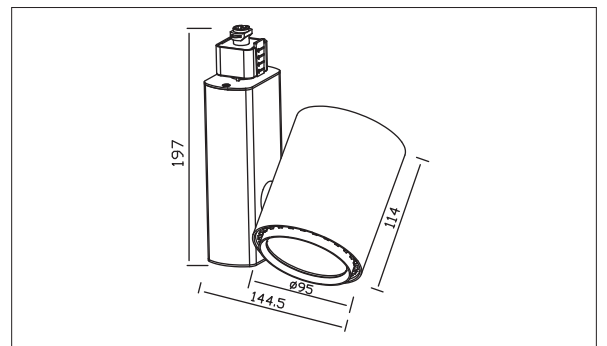

Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Adaptor
Wiring:	Screws
Optics:	V.M.Reflector
MOQ	204 pcs


PACKING

Box size:	24.5 x 20 x 10 cm
Carton size:	41.5 x 25.5 x 42 cm
Pcs per carton:	8 pcs
Each carton :	0,044 m ³



HKTA8588



LED Brand	SUNFOR LSP01-601-830-230
LED Power	8 W
Driver Current	500 mA
Total Power	8 W
Luminous Flux	610 LM
CCT	3000 K
CRI	> 80
Beam Angle	40 °

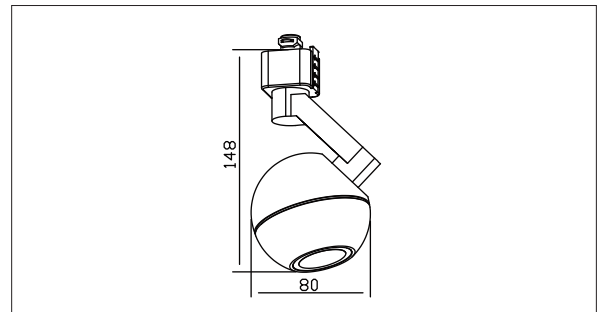

Input:	220-240 V AC 50/60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Screws
Wiring:	W / screws
Optics:	V.M. Reflector
MOQ:	204

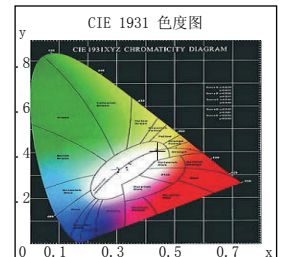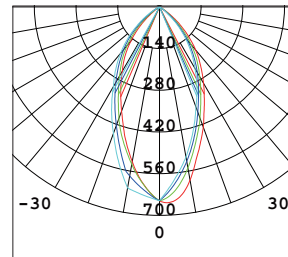


PACKING

Box size:	19.5 x 14 x 11 cm
Carton size:	57 x 40.5 x 29.5 cm
Pcs per carton:	20 pcs
Each carton :	0.030 m ³



MHT8544-LED



LED Brand	CITIZEN CLU034-1205B8-303M1A2
LED Power	23 W
Driver	AK-30W-700-D6
Total Power	25 W
Driver Current	700 mA
Luminous Flux	1930 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	24 °

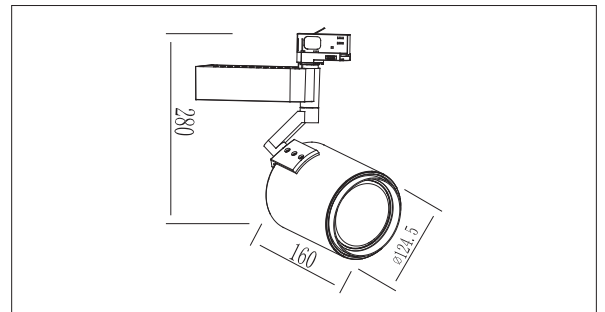


Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Adaptor
Wiring:	Track adaptor
Optics:	V.M.Reflector
MOQ	200 pcs

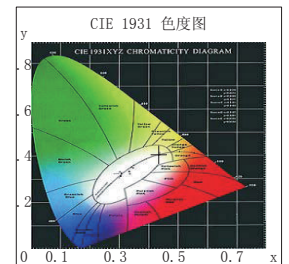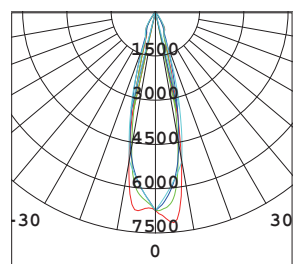


PACKING

Box size:	33 x 25 x 13.5 cm
Carton size:	51.5 x 34.5 x 42.5 cm
Pcs per carton:	6 pcs
Each carton :	0,075 m ³

MHT8579

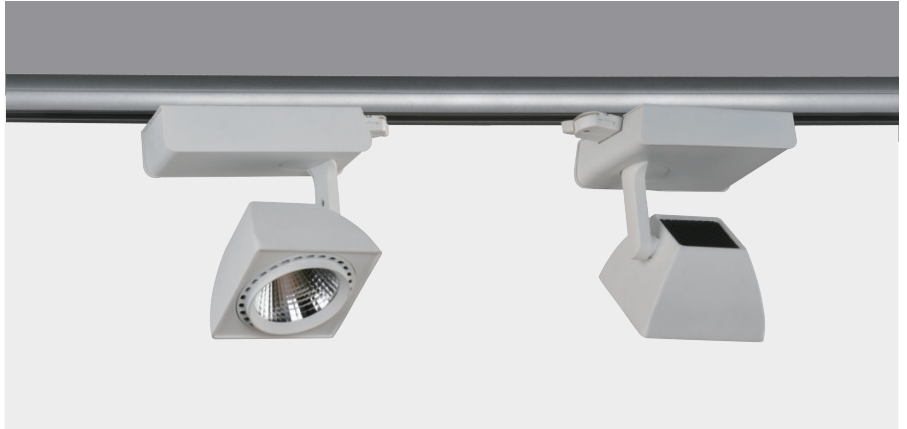

LED Brand	CITIZEN
	CLU034-1208B8-303M1A2
LED Power	33 W
Driver	OTE-50-220-240-1AO-CS
Total Power	37 W
Driver Current	925 mA
Luminous Flux	3150 LM
CCT	3000 K
CRI	≥ 80 / 90
Beam Angle	28 °

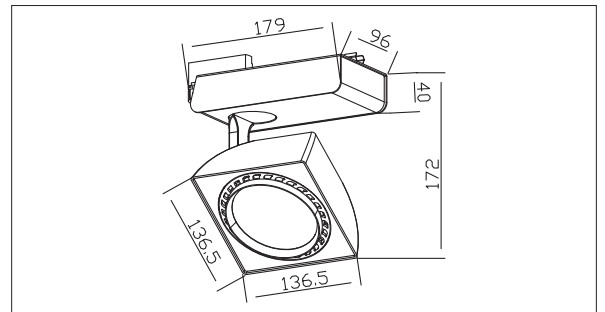

Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Screws
Wiring:	W/screws
Optics:	V.M.Reflector
MOQ	204 pcs


PACKING

Box size:	26 x 26 x 13 cm
Carton size:	53.5 x 27 x 41 cm
Pcs per carton:	6 pcs
Each carton :	0,059 m ³


MHT8540



LED Brand	Bridgelux	BXRA-30E4000
LED Power	44 W	
Driver	KEP-55W-BFAN	
Total Power	50 W	
Driver Current	1800 mA	
Luminous Flux	3350 LM	
CCT	3000 K	
CRI	> 80	
Beam Angle	46 °	

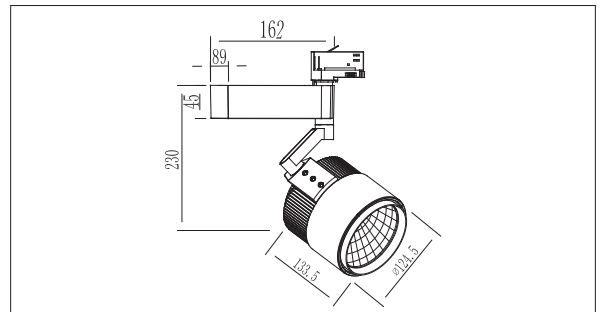

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/4 Wire Track Adaptor
Wiring:	Connect toTrack W/Adaptor
Optics:	V.M. Reflector
MOQ	120 pcs

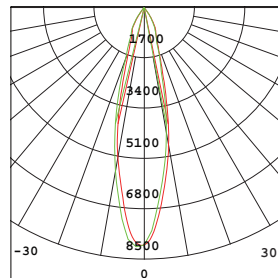

h (m)	24.59 °	∅(cm)
5430	1	43.60
1357	2	87.19
603	3	130.79
339	4	174.38
217	5	217.98


PACKING

Box size:	33 x 25 x 13.5 cm
Carton size:	52 x 34.5 x 43.5 cm
Pcs per carton:	6 pcs
Each carton :	0,078 m ³


MHT8548



LED Brand	Bridgelux V10 BXRE-30E1000
LED Power	13 W
Driver	KEP0902-500-D6
Total Power	15.5 W
Driver Current	350 mA
Luminous Flux	1130 LM
CCT	3000 K
CRI	> 80
Beam Angle	16°

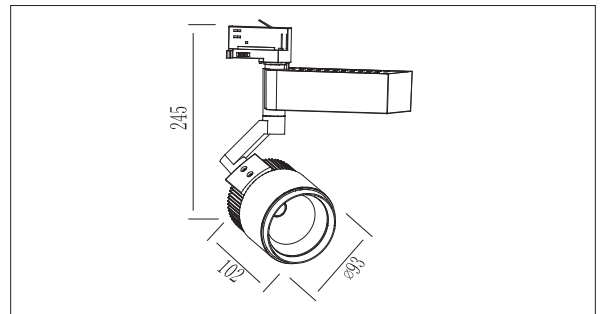

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/4 Wire Track Adaptor
Wiring:	Connect to Track W/Adaptor
Optics:	V.M. Reflector
MOQ	120 pcs

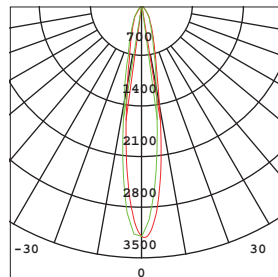

E (lx)	h (m)	16.74°	Ø (cm)
2229	1		29.43
557	2		58.86
247	3		88.29
193	4		117.72
89	5		147.15


PACKING

Box size:	26.5 x 23 x 10.5 cm
Carton size:	54.5 x 47.5 x 33 cm
Pcs per carton:	12 pcs
Each carton :	0,085 m ³

MHT8148-LED



LED Brand	Bridgelux BXRC-30E4000-F-02
LED Power	35 W
Driver	LTC40W1200 UNI
Total Power	40 W
Driver Current	1200 mA
Luminous Flux	3000 LM
CCT	3000 K
CRI	> 80
Beam Angle	24 °

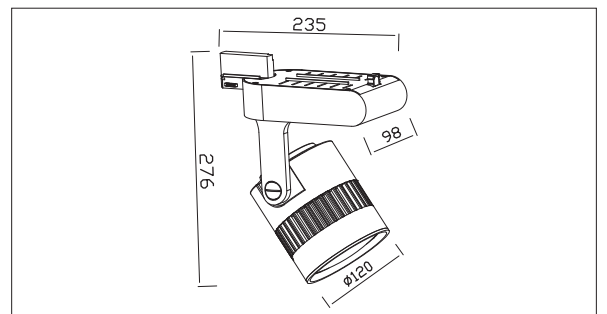

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W / adaptor
Wiring:	track adaptor
Optics:	V.M. Reflector
MOQ	102 pcs


PACKING

Box size:	27.5x26.5x14.5 cm
Carton size:	54.5x28.5x45.5 cm
Pcs per carton:	6 pcs
Each carton :	0,07 m ³

MHT8148



Lampholder type:	G12
Lamp Type:	HIT-CE Max 70 W
Control Gear:	Electronic HID ballast 230V 70 W
Installation :	W/Track Adaptor
Wiring:	Connect to Track w/ adaptor
Diffuser:	3mm tempered center-frosted glass

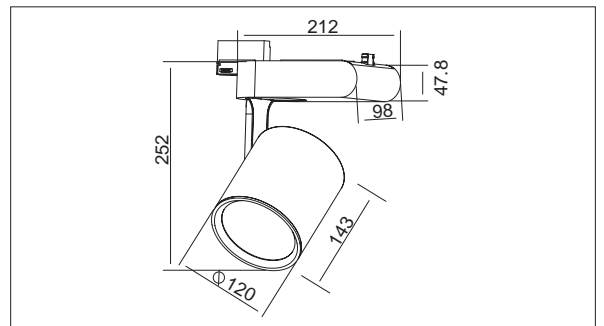

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W / adaptor
Wiring:	track adaptor
Optics:	V.M. Reflector
MOQ	102 pcs


PACKING

Box size:	27.5x26.5x14.5 cm
Carton size:	54.5x28.5x45.5 cm
Pcs per carton:	6 pcs
Each carton :	0,07 m ³

MHT8667A



Lampholder type:G12
Lamp Type: HIT-CE Max 70 W
Control Gear: Electronic HID ballast 230V 70 W
Installation : W/Track Adaptor
Wiring: Connect to Track w/ adaptor
Diffuser: 3mm tempered center-frosted glass

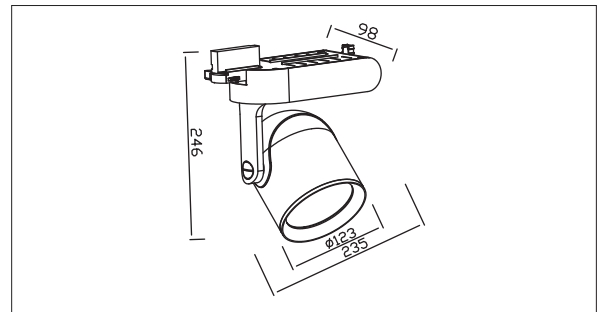

Input: 110-230V AC 50/60Hz
Main Material: Aluminium + Steel
Surface Finish: White, Grey, Black powder coating
Adjustable : Gimbal
Installation by: W / adaptor
Wiring: track adaptor
Optics: V.M. Reflector
MOQ 102 pcs



PACKING

Box size: 27.5x26.5x14.5 cm
Carton size: 54.5x28.5x45.5 cm
Pcs per carton: 6 pcs
Each carton : 0,07 m³

MHT8555



LED Brand	Citizen CLL032-1208A5-303M1A2
LED Power	25 W
Driver	AK-30W-700-D6
Total Power	30 W
Driver Current	700 mA
Luminous Flux	2100 LM
CCT	3000 K
CRI	> 80
Beam Angle	25°

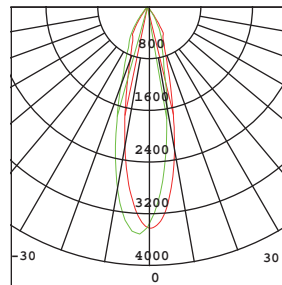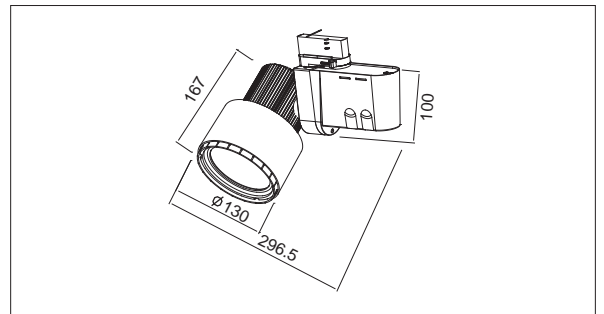

h (m)	25.29°	Ø (cm)
1		44.88
2		89.75
3		134.63
4		179.51
5		224.39

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W / adaptor
Wiring:	track adaptor
Optics:	ano. reflector
MOQ	102 pcs

PACKING


Box size:	33.5 x 21 x 17.5 cm
Carton size:	43.5 x 32.5 x 54.5 cm
Pcs per carton:	6 pcs
Each carton :	0,077 m ³

MHT8573



- Passive cooling
- Patent product / 专利产品

LED Brand	Bridgelux BXRC-30E4000-F-03
LED Power	37 W / 46 W
Driver	LTC40W1200 UNI / LTC60W1500 UNI
Total Power	40 W / 50 W
Driver Current	1200 / 1500 mA
Luminous Flux	3350 / 3800 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	15 ° / 25 ° / 60 °

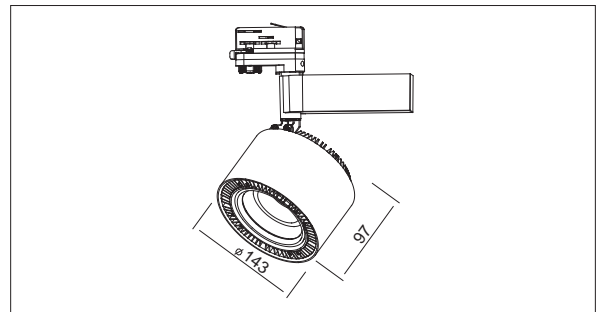

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W / adaptor
Wiring:	track adaptor
Optics:	V.M. Reflector
MOQ	204 pcs

PACKING


Box size:	27.5 x 26.5 x 14.5 cm
Carton size:	54.5 x 28.5 x 45.5 cm
Pcs per carton:	6 pcs
Each carton :	0,07 m ³

MHT8575



- Passive cooling
- Patent product / 专利产品

LED Brand	CITIEEN CLU034-1208B8-303M1A2
LED Power	41 W
Driver	OTe 50/220-240/1A4 CS(OSRAM)
Total Power	47 W
Driver Current	1150 mA
Luminous Flux	3370 LM
CCT	3000 K
CRI	≥ 80
Beam Angle	12 ° / 22 ° / 36 °

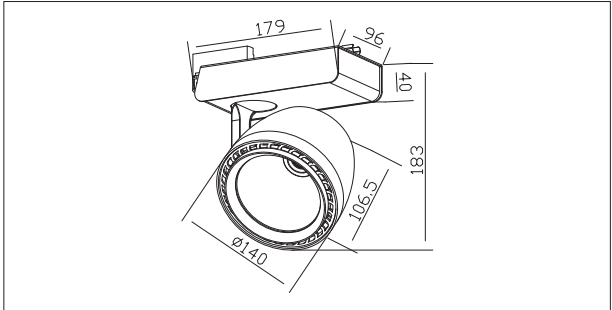

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W / adaptor
Wiring:	track adaptor
Optics:	V.M. Reflector
MOQ	204 pcs


PACKING

Box size:	27.5 x 26 x 14.5 cm
Carton size:	53.5 x 28.5 x 45.5 cm
Pcs per carton:	6 pcs
Each carton :	0,057 m ³

MHT8527




LED Brand	Bridgelux V10 BXRE-30E1000	
LED Power	9.5 W	12 W
Driver	AK-10W-36330-D5	KEP-LD18W-D1
Total Power	11.5 W	15.5 W
Driver Current	350 mA	500 mA
Luminous Flux	740 LM	1130 LM
CCT	3000 K	
CRI	> 80	
Beam Angle	33 ° (60 °)	

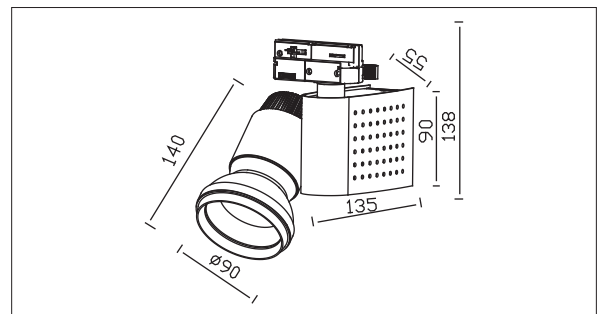


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/3 wire track adaptor
Wiring:	Terminal Block
Optics:	Anodized aluminium Reflector
MOQ	204 pcs

Bridgelux 9.5W

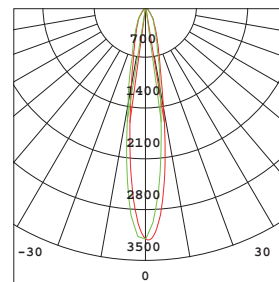

E (lx)	h (m)	16.74 °	Ø (cm)
2229	1		29.43
557	2		58.86
247	3		88.29
193	4		117.72
89	5		147.15

Bridgelux 13.6W

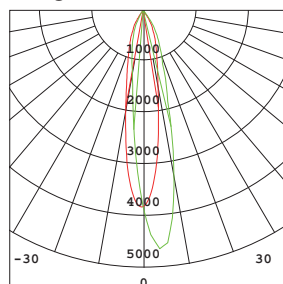

E (lx)	h (m)	17.95 °	Ø (cm)
2926	1		31.59
732	2		63.18
325	3		94.77
183	4		126.37
117	5		157.96


PACKING

Box size:	16.5 x 16.5 x 23 cm
Carton size:	51.5 x 47.5 x 35.5 cm
Pcs per carton:	4 pcs
Each carton :	0,086 m ³


MHT8562



LED Brand	Bridgelux V10 BXRE-30E1000
LED Power	12 W
Driver	KEP0902-500-D6
Total Power	15.5 W
Driver Current	350 mA
Luminous Flux	1130 LM
CCT	3000 K
CRI	> 80
Beam Angle	18 ° (30 °)

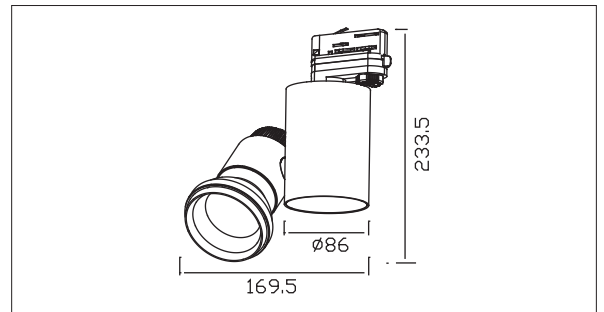

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/3 wire track adaptor
Wiring:	Terminal Block
Optics:	Anodized aluminium Reflector

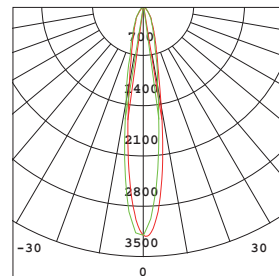

E (lx)	h (m)	∅ (cm)
2229	1	29.43
557	2	58.86
247	3	88.29
193	4	117.72
89	5	147.15


PACKING

Box size:	17.5 x 10 x 24 cm
Carton size:	54.5 x 21.5 x 26.5 cm
Pcs per carton:	6 pcs
Each carton :	0,086 m ³


MHT8572



LED Brand	Bridgelux Vero13 BXRC-30E2000
LED Power	23 W
Driver	AK-30W-700-D6
Driver Current	700 mA
Total Power	26 W
Luminous Flux	1780 LM
CCT	3000 K
CRI	> 80
Beam Angle	18° (30°)

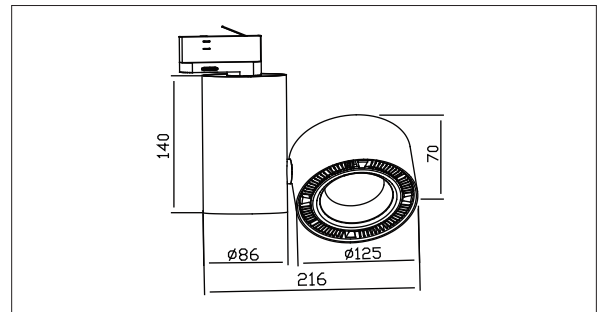

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/3 wire track adaptor
Wiring:	Terminal Block
Optics:	Anodized aluminium Reflector

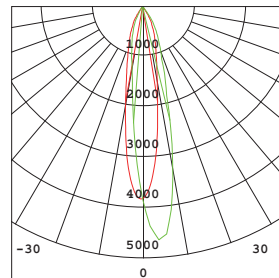

h (m)	17.95°	Ø (cm)
1		31.59
2		63.18
3		94.77
4		126.37
5		157.96


PACKING

Box size:	18.3 x 9.1 x 22.5 cm
Carton size:	57 x 20 x 25 cm
Pcs per carton:	6 pcs
Each carton :	0,086 m ³


MHT8561



LED Brand	Bridgelux V10 BXRE-30E1000
LED Power	13.5 W
Driver	KEP0902-500-D6
Total Power	15.5 W
Driver Current	350 mA
Luminous Flux	1130 LM
CCT	3000 K
CRI	> 80
Beam Angle	18 ° (30 °)

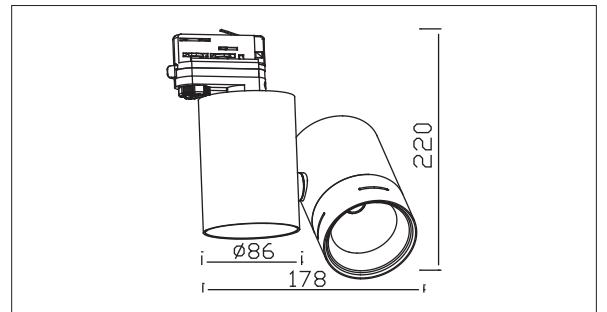

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/3 wire track adaptor
Wiring:	Terminal Block
Optics:	Anodized aluminium Reflector

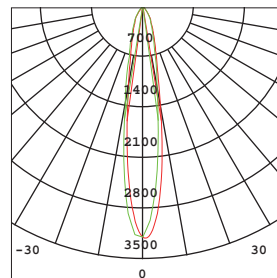


E (lx)	h (m)	16.74 °	Ø (cm)
2229	1		29.43
557	2		58.86
247	3		88.29
193	4		117.72
89	5		147.15


PACKING

Box size:	18.3 x 9.1 x 22.5 cm
Carton size:	57 x 20 x 25 cm
Pcs per carton:	6 pcs
Each carton :	0,086 m ³

MHT8557

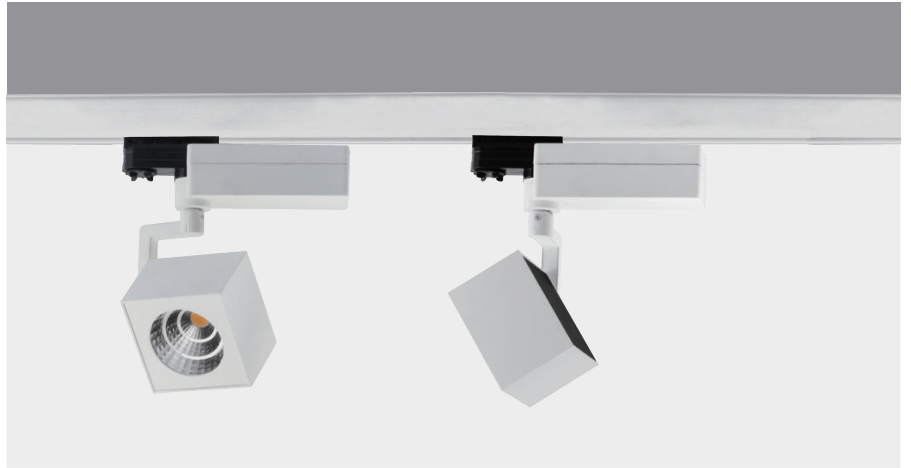

LED Brand	CITIZEN
	CLL-032-1205A5-303M1A2
LED Power	12 W
Driver	AK-16W-60350-D6
Driver Current	350 mA
Total Power	15 W
Luminous Flux	1080 LM
CCT	3000 K
CRI	> 80
Beam Angle	17 ° (24 ° / 60 °)

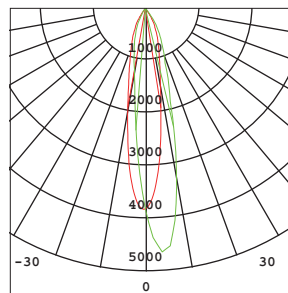

h (m)	17.95 °	∅ (cm)
2926	1	31.59
732	2	63.18
325	3	94.77
183	4	126.37
117	5	157.96

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/screws
Wiring:	Terminal Block
Optics:	PC Metallized Reflector

Dumper

Dumper Series are compact in structure and elegant in appearance with excellent industrial design. Optical performance is outstanding. Mechanical performance is good with 350° rotation and 90° tilt to adjust light direction flexibly.

PACKING

Box size:	23 x 21.5x 9.5 cm
Carton size:	47.5 x 44.5 x 31.5 cm
Pcs per carton:	12 pcs
Each carton :	0,067 m ³


KTK1-8587
HKTA-8587
HC8587



LED Brand	Bridgelux BXRE-27E0800-B
LED Power	6 W / 9 W
Driver	HEP LIC9W350 UNI / HEP LIC9W500 UNI
Total Power	7 W / 10 W
Driver Current	350 mA / 500 mA
Luminous Flux	450 LM / 600 LM
CCT	2700 K
CRI	≥ 80
Beam Angle	30 °



Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	2 Wire track adaptor
Wiring:	Connect to track adaptor
Optics:	V.M. Reflector
MOQ	216 pcs

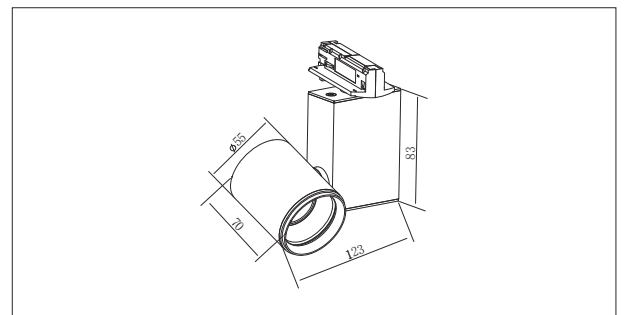

PACKING

Box size:	17 x 15.5 x 6.5 cm
Carton size:	48.5 x 35.5 x 28 cm
Pcs per carton:	24 pcs
Each carton :	0.048 m ³


KTK1-8591
HKTA-8591
HC8591



LED Brand	Bridgelux BXRE-27E0800-B
LED Power	6 W
Driver	HEP LIC9W350 UNI
Total Power	7 W
Driver Current	350 mA
Luminous Flux	450 LM
CCT	2700 K
CRI	≥ 80
Beam Angle	28.3 °





Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	2 Wire track adaptor
Wiring:	Connect to track adaptor
Optics:	V.M. Reflector
MOQ	216 pcs

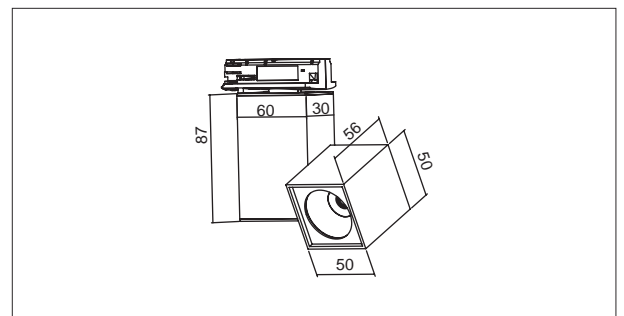

PACKING

Box size:	17 x 15.5 x 6.5 cm
Carton size:	48.5 x 35.5 x 28 cm
Pcs per carton:	24 pcs
Each carton :	0.048 m ³




KTK1-8592
HKTA-8592
HC8592



LED Brand	Bridgelux BXRE-27E0800-B
LED Power	6 W
Driver	HEP LIC9W500 UNI
Total Power	10 W
Driver Current	500 mA
Luminous Flux	450 LM
CCT	2700 K
CRI	≥ 80
Beam Angle	28.3 °




Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium + Steel
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	2 Wire track adaptor
Wiring:	Connect to track adaptor
Optics:	V.M. Reflector
MOQ	216 pcs

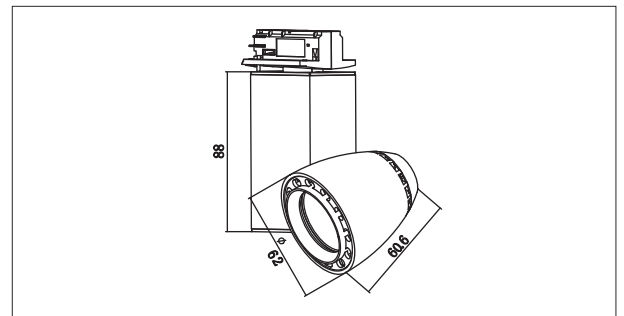

PACKING


Box size:	17 x 15.5 x 6.5 cm
Carton size:	48.5 x 35.5 x 28 cm
Pcs per carton:	24 pcs
Each carton :	0.048 m ³

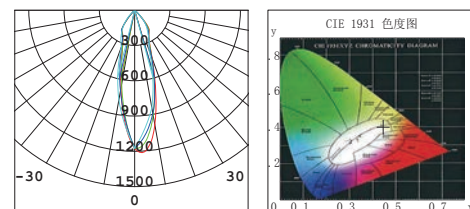


KTWA8551



LED Brand	Bridgelux V8 BXRE-30E0800
LED Power	6 W
Driver	AK-10W-36330-D0
Total Power	7.5 W
Driver Current	350 mA
Luminous Flux	610 LM
CCT	3000 K
CRI	> 80
Beam Angle	33 ° / 60 °

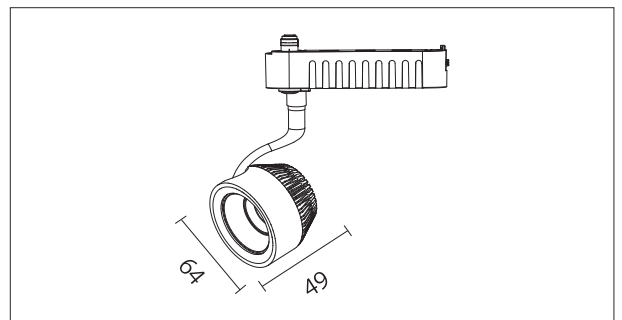

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Adaptor
Wiring:	track adaptor
Optics:	ano. reflector
MOQ	300 pcs

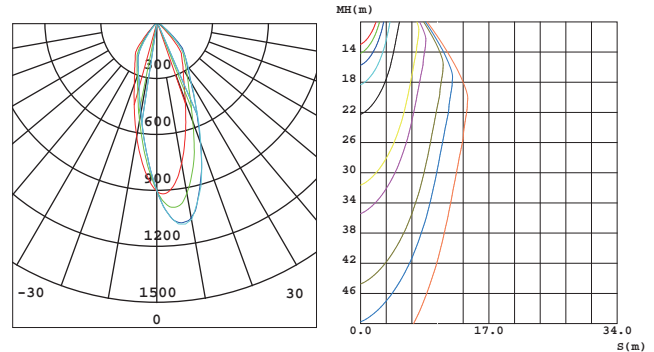


PACKING

Box size:	16 x 14 x 8.5 cm
Carton size:	44 x 33.5 x 36 cm
Pcs per carton:	24 pcs
Each carton :	0,053 m ³


KTWA8133



LED Brand	Bridgelux V8 BXRE-30E0800
LED Power	6 W
Driver	AK-10W-36330-D0
Total Power	7.5 W
Driver Current	350 mA
Luminous Flux	610 LM
CCT	3000 K
CRI	> 80
Beam Angle	33 ° / 60 °

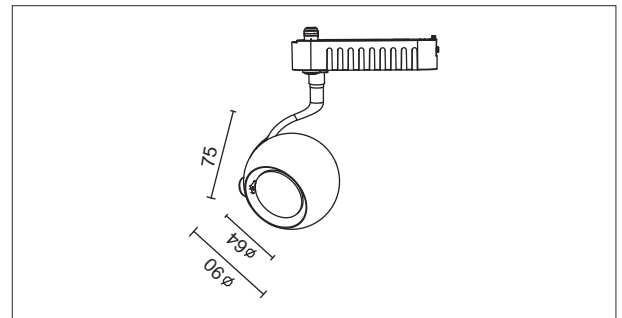


Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	W/ adaptor
Wiring:	track adaptor
Optics:	ano. reflector
MOQ	300 pcs

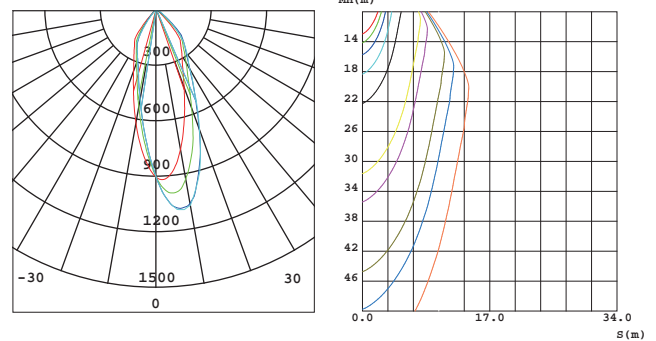


PACKING

Box size:	10 x 10 x 18 cm
Carton size:	52 x 52 x 38 cm
Pcs per carton:	50 pcs
Each carton :	0,074 m ³


KTX8554

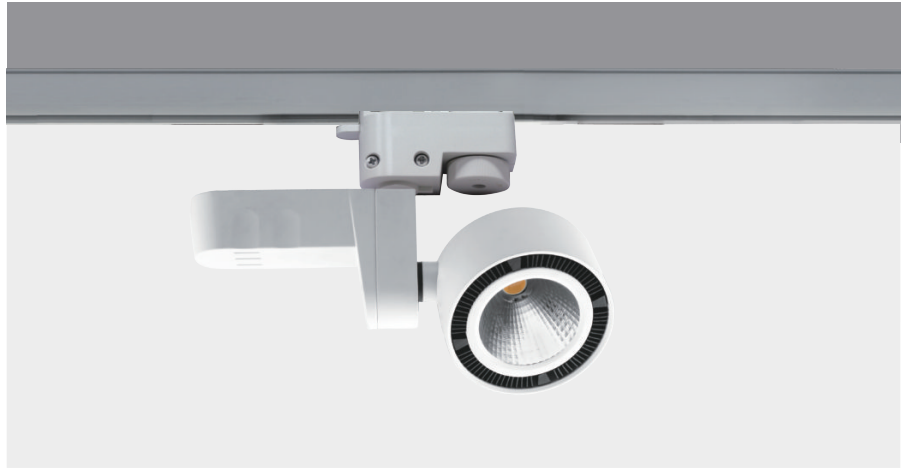

Input:	110-230 V AC 50/60 Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	adaptor
Wiring:	Track adaptor
Optics:	V.M. Reflector

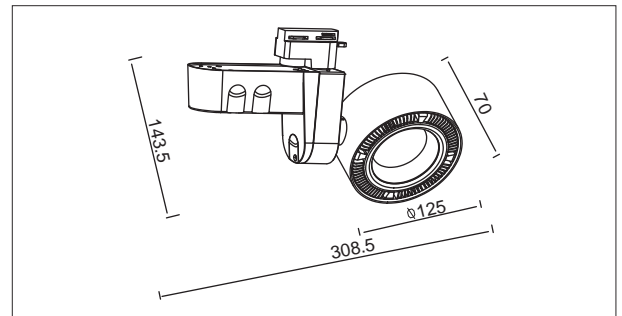

Input:	110-230V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Adaptor
Wiring:	track adaptor
Optics:	ano. reflector
MOQ	300 pcs

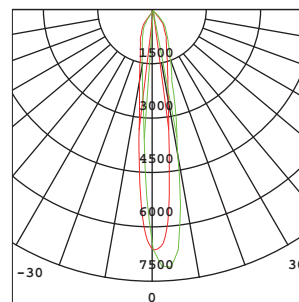

h (m)	20.58 °	∅ (cm)
1		25.59
2		51.18
3		76.76
4		102.35
5		127.94

PACKING


Box size:	33 x 21.1 x 8 cm
Carton size:	44.5 x 34 x 38 cm
Pcs per carton:	8 pcs
Each carton :	0.051 m ³

MHT8576





- Passive cooling
- Patent product / 专利产品

LED Brand	CITIEEN	CLU034-1208B8-303M1A2
LED Power	32 W	
Driver	LC 40W 900mA	
Total Power	36 W	
Driver Current	900 mA	
Luminous Flux	3100 LM	
CCT	3000 K	
CRI	≥ 80	
Beam Angle	15 ° / 28 ° / 38 °	

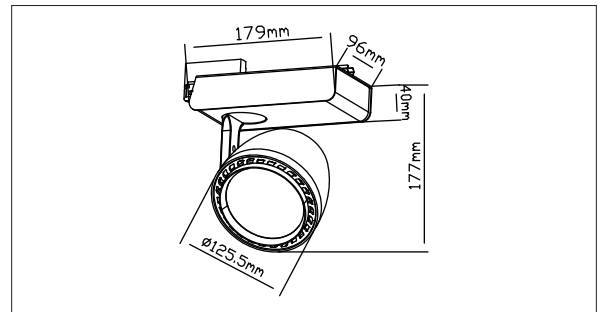

Input:	220-240V AC 50/60Hz
Main Material:	Aluminium
Surface Finish:	White, Grey, Black powder coating
Adjustable :	Gimbal
Installation by:	Screws
Wiring:	W/screws
Optics:	V.M.Reflector
MOQ	204 pcs

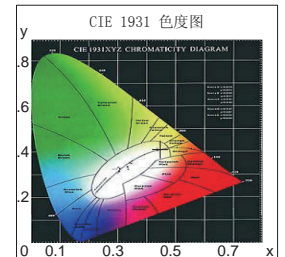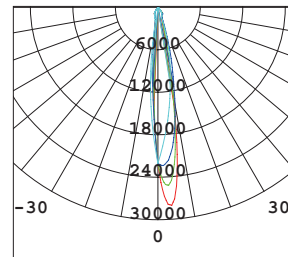

PACKING

Box size:	27.5 x 25 x 14.5 cm
Carton size:	53.5 x 28.5 x 45.5 cm
Pcs per carton:	6 pcs
Each carton :	0,057 m ³